



ESS creates **High Adrenaline Eye Protection™** systems for military, law enforcement, and fire/rescue professionals. Designed to take on the most hostile and unforgiving environments on the planet, ESS products feature cutting-edge technologies and patented innovations to ensure peak performance and uncompromised eye safety.

US Patent # US D510,378 S. All trademark, copyright and other intellectual property rights reserved.

PROFILE NVG™



The ESS *Profile NVG™* goggle was created with input from US Special Forces groups. Its compact, low-profile frame offers optimal helmet and night vision systems compatibility.

The *Profile NVG™* also provides:


- Excellent impact protection
- Wide field of vision
- Superior anti-fog performance
- 100% UVA/UVB protection
- Filtration of airborne dust and debris
- Comfortable, anatomical fit



Strap Adjustment



- 1) To tighten the strap, simply pull each of the 2 slide buckles evenly in the direction toward the frame.

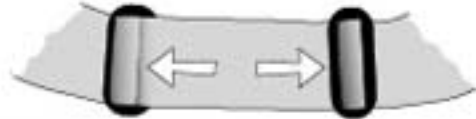

- 2) To loosen the strap, slide the 2 buckles evenly toward the center (rear) of the strap.



Lens Removal




Lenses are easily removed by peeling the goggle frame away from the lens, starting at the top and working around the sides, then across the bottom.




Lens Installation



To keep the lens clean during the installation process, hold it by the edges and avoid contact with the lens surface.

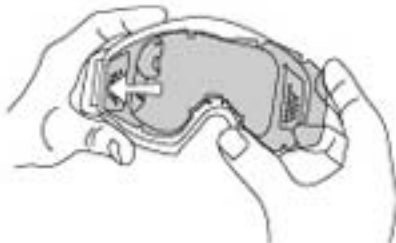

- 1) Place one end of the lens into the corresponding groove in the side of the frame.

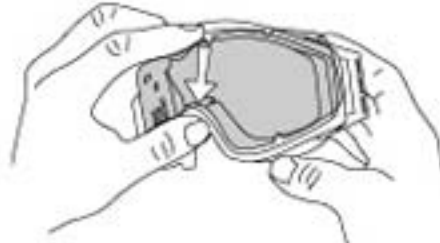


- 2) Continue inserting the lens along the bottom of the goggle frame and across the nose, fitting the lens retention holes into the goggle frame posts.

Lens Installation



- 3) Insert the other side of the lens into the goggle frame.

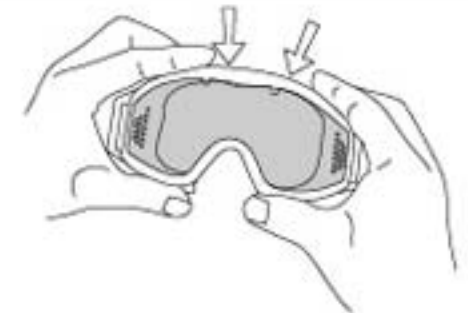

- 4) Finish with the top, making sure that the goggle frame posts are firmly seated in the corresponding lens holes.

Strap Removal and Re-attachment



There may be cases that require the removal of the goggle strap. For example, to install the SpeedSleeve™ (see Accessories), you will first need to remove (and subsequently re-attach) one side of the strap.

- 1) Begin by removing the lens (see Lens Removal instructions).
- 2) Compress the frame down and away, then work the Outrigger pins out of the frame.
- 3) To reattach the strap, simply reverse the process. (If both sides of the strap have been removed, identify the correct clip, as marked for the users' right and left). Start at the bottom of the goggle by positioning the clip into the frame, then fit the top of the clip into the frame.
- 4) Re-install the lens.



Accessories



- **Prescription Inserts:** These R_x lens frames accommodate corrective lenses and easily install inside the goggle frame.
- **SpeedSleeves™:** Eliminate glint off the lens and keep the goggle and lens clean & scratch-free when not being worn.
- **Replacement Lenses:** Replacement lenses for Profile Series goggles are available in single and 50-pack configurations.

Visit www.essgoggles.com for the latest ESS products and accessories

Maintenance



LENS CARE

ESS lenses have been specially coated to offer outstanding abrasion resistance and fog-resistance. Special care is required to keep them performing at their best.

- Clean the lens with water only. Do not use cleaners or solvents.
- Use a soft cotton cloth and gently wipe clean. Never use paper products to clean the lenses and avoid wiping the lens surface when dry and dirty as this may scratch the lens.
- If the lens is cracked or severely scratched, replace the lens.

GOGGLE CARE

- To clean the goggle, remove the lens and clean separately. The frame and strap may be gently hand washed in a mild soap solution, rinsed, and air dried.
- Store the goggle in a cool, dry place away from direct sunlight.
- If storing the goggle on a helmet, loosen the straps to prevent stretching.

LIMITED WARRANTY:

ESS products are warranted against defects in material and workmanship for one year from the date of purchase. Within the terms of this warranty, ESS will repair or replace, at our discretion, any product proving to be defective after our receipt and inspection.

Please contact ESS Customer Service for warranty information: ess@essgoggles.com



CAUTION:

No protective eyewear can protect the wearer from all potential impacts. Although this product exceeds all of the ANSI Z87.1+ requirements including those for impact resistance, this product WILL NOT protect against all impacts nor will it protect against all chemical splashes. If goggles are worn over standard ophthalmic spectacles when impacts occur, there may be an increased hazard to the wearer. Do NOT use in the sport of Paintball. If used in Airsoft or training exercises involving marking rounds, ONLY wear in conjunction with an ESS-approved face/head protection system. Contact ESS with any questions. Carefully read and follow the instructions.



ESS
Eye Safety Systems, Inc.

Eye Safety Systems, Inc.
P.O. Box 1017
Sun Valley, ID 83353, USA

Toll Free: 877.726.4072
International: +1.208.726.4072
Fax: +1.208.726.4563
E-mail: ess@essgoggles.com
Web: www.essgoggles.com